FH-CeilingMountTrack - Single

The **CS FH-CeilingMountTrack** is supplied with full-length fins that enable the ceiling lining to be fixed flush with the underside of the track. This ensures the continuation of the ceiling-line through where the door slides. The track can also be painted on site to match the ceiling color.

FH-CeilingMountTrack can be upgraded to SofStop® soft close. This is suitable for areas where quiet is required, such as bedrooms, offices and patient rooms.

COMPATIBLE WITH:
SofStop® Soft Close / Soft Open

Standard Features & Options

- Suitable for large room dividers or surface sliding applications.*
- Track can be configured to suit Bi-Parting door set-ups, including CornerMeeting detail.
- 304 stainless steel components available for corrosive environments.
- Track may be painted on site to match ceiling color. (See data sheet on our website).

*Not suitable for use in a pre-fabricated pocket frame. You will need to build a wall either side of the track when using in a pocket application.

Technical Information



Finish:	Clear anodized
Door Thickness:	No limit
Max Door Weight:	Std: 240kg (500lb) SofStop: 120kg (264lb)
Carriage Pack:	M6/M8/SofStop

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

1. Heavy duty one-piece extruded aluminum track.
2. Pre-machined mounting holes.
3. Minimal clearance means the carriages/ wheels cannot jump off the track or jam.
4. Large diameter wheels with precision ground bearings make for smooth running.
5. Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
6. M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
7. CarriSnap™ quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.

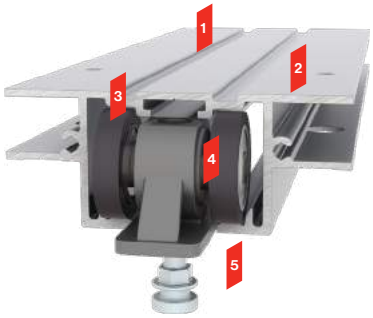

FH-Ceiling Mount Track with M6 carriage

M8 carriage & mounting plate with stop

Fixing Detail

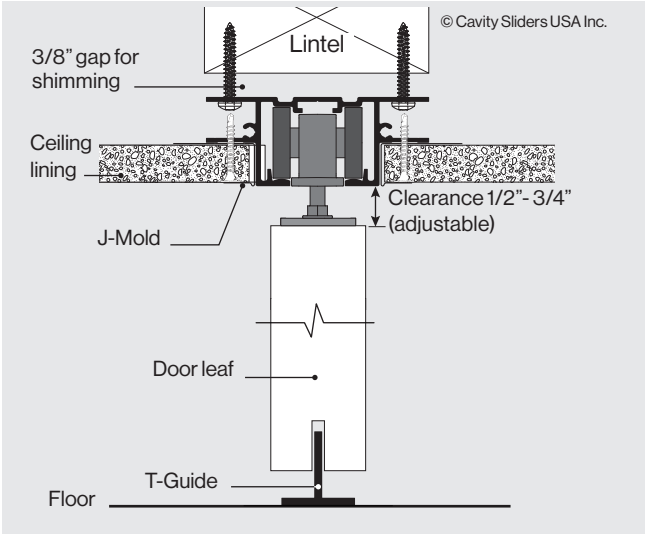

SofStop® Features & Options

- Single or Twin action (soft open/soft close) options available.
- High quality soft close mechanism has been independently tested to 100,000 cycles.
- The soft close mechanism is hidden from sight, yet remains fully serviceable.

Standard	**M6** (200lb/90kg)	
	M8 (500lb/240kg)	
CS SofStop	**Minimum Door Width**	
	No Stop	**1 Stop**
0 - 200 lb (90kg)	23" (584mm)	26" (660mm)
CS SofStop HD	**No Stop**	**1 Stop**
0 - 350 lb (160kg)	26" (660mm)	29" (737mm)

How to Order

Refer to Carriage Packs page for more information

1. Specify track length
   Available in 6', 8',12 and 24' pre-cut lengths or can be cut down to specified length on request.
2. Specify door weight & width (see options)
3. Choose a carriage pack (one per door)
   - refer to Carriage Packs page
   M6 (200lb), M8 (500lb) or SofStop

FH-CeilingMountTrack - Double/Triple

The **CS FH-CeilingMountTrack** is supplied with full-length fins that enable the ceiling lining to be fixed flush with the underside of the track. This ensures the continuation of the ceiling-line through where the door slides. The track can also be painted on site to match the ceiling color.

FH-CeilingMountTrack is available as standard in a single, double and triple track configuration.

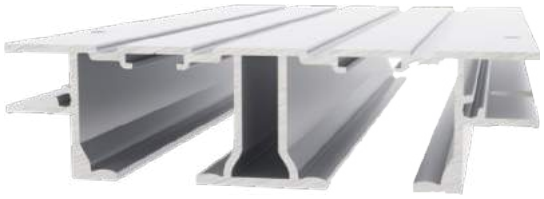

Double FH-CeilingMountTrack (1-3/8" door option)

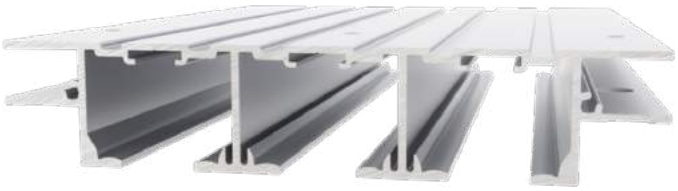

Triple FH-CeilingMountTrack (1-3/8" door option)

COMPATIBLE WITH:
SofStop® Soft Close / Soft Open

Technical Information

Double Track - 1-3/8" doors



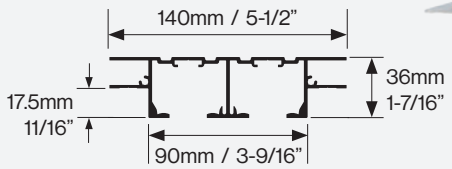

1-3/4" doors



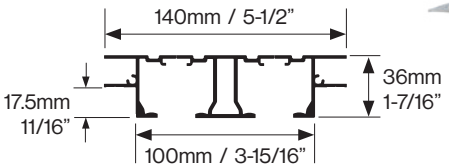

Triple Track - 1-3/8" doors

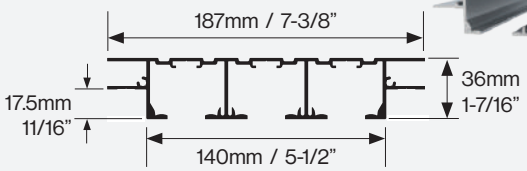

1-3/4" doors



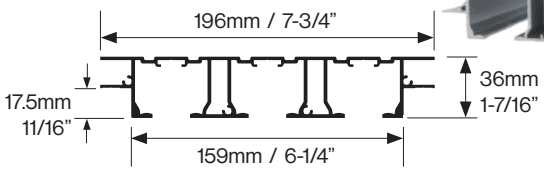

Track	Double	Triple
Finish	Mill-finish	Mill-finish
Recommended Door Thickness	35 or 45mm (1-3/8" or 1-3/4")	35 or 45mm (1-3/8" or 1-3/4")*
Max Weight/door	240kg (500lb)	240kg (500lb)
Carriage Pack	M6 or M8	M6 or M8

*For thicker doors, please contact us for suitable options

Suggested Fixing Detail

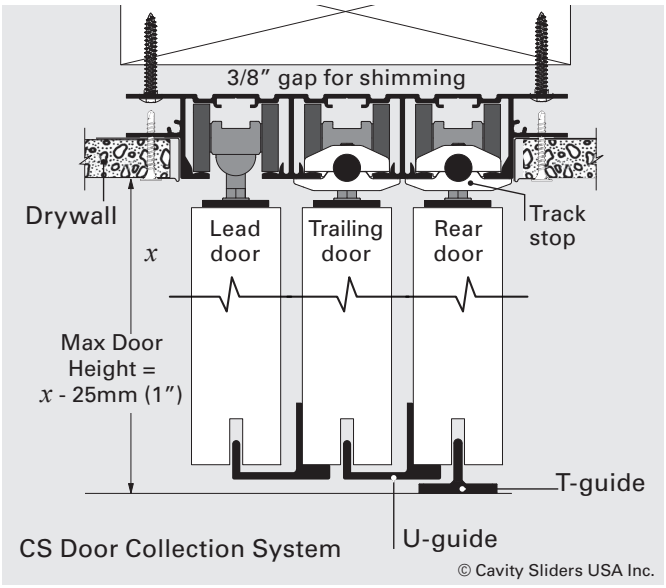

Design Features & Options

- Tracks can be used for bypass and collection systems.
- Tracks can be configured to suit Bi-Parting door set-ups, including CornerMeeting detail.
- Available in 6', 8', 12' and 24' pre-cut lengths. Custom lengths can be cut to order.
- Track may be painted on site to match ceiling color. (See data sheet available for download from our website).
- Ceiling linings may be fixed flush with the underside of the track.
- Heavy duty one-piece extruded aluminum track.

M8 carriage & mounting plate with stop

- Pre-machined mounting holes.
- CarriSnap™ quick release system allows the door to be removed easily from track; no need to unscrew anything and lose door height adjustment.

Door Collection System

Where multiple doors are required to slide in conjunction with one another, the **CS Door Collection System** ensures a smooth running telescopic system ***(see separate brochure).*** The doors are connected so that there is no need for floor tracks or guides through the opening.

How to Order

1. Choose track configuration (double or triple)
2. Specify door thickness
3. Specify track length
   (available in 6, 8, 12 and 24' pre-cut lengths)
4. Choose a carriage pack (one per door)
   - ***refer to Carriage Packs page***
   a) M6 (200lb)
   b) M8 (500lb)
   (includes carriages, mounting plates, T-Guide, fixing screws, adjusting wrench and installation instructions)
   c) CS Door Collection System (for telescopic doors)
   (includes M6 or M8 carriage pack plus door collection system for 2 door or 3 door setup)