

Drawing : open to 180°

3-D adjustable concealed hinge for larger doors and providing a wider throw for doors with claddings up to a thickness of 9 mm. Magnetically fixed coverplates provide installation without visible fasteners.

Max Door Weight (per pair) / **352 lbs.** (160kg)

Min Door Thickness / **1-3/4** (45mm) w/o cladding

Height / **9.45"** (240mm)



Widths / Frame : **1.46"** (37mm) / Door: **1.38"** (35mm)

Throw allows for cladding up to **9mm** (.35")

Accessories : Casing frame fixing plates and metal frame receivers available.

Finishes / SNL satin nickel look
SSL satin stainless steel look
DBZ dark bronze

Other finishes available on request. Please call for info.

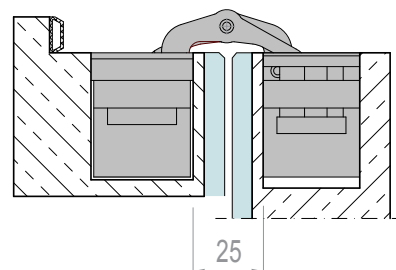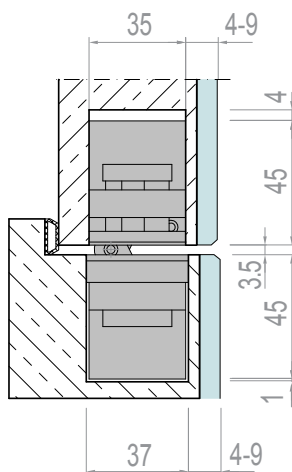

Section of Wood Frame-Door Installation (example shown - mirror-clad door and frame)

* NOTE : Refer to milling documents for proper cladding and door preparation. Minimum clearance between door and frame open to 180° is 7mm with cladding.