

WallMountTrack



WallMountTrack

The CS WallMountTrack is suitable for surface sliding applications where there is enough strength in the wall to side mount a track system above an opening.

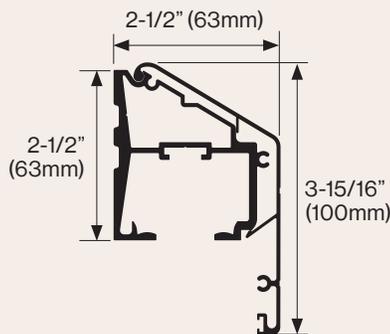
Installation is quick and easy as the track is supplied with pre-machined fixing slots.

Compatible with SofStop® soft open / soft close

Features

- 304 stainless steel components available for corrosive environments.
- Track can be configured to suit Bi-Parting doors.
- Fascia may be anodized or powder coated. Standard finishes: Clear or Bronze Anodized. Inquire about custom colors.

Product Specifications



Technical Information

Fascia Finish	Clear or Bronze Anodized Aluminum
Track Finish	Milled Aluminum
Door Thickness	1-3/8" to 1-3/4" (35-45mm)
Max Door Weight	Standard: 240kg (500lb) SofStop: 120kg (264lb)
Carriage Pack	M6 (200lb), M8 (500lb), SofStop, SofStop HD

How to Specify

1. Specify door thickness: 1-3/8" and 1-3/4" doors
2. Specify track length
Available in 6, 8, 12, and 24' pre-cut lengths
3. Choose a carriage pack (one per door)
(Includes carriages, mounting plates, T-Guide, fixing screws, adjusting wrench and installation instructions)
 - a. M6 (200 lb)
 - b. M8 (500lb)
 - c. SofStop
 - d. SofStop HD
 - e. CS Door Collection System (For multiple tracks)
(includes M6 or M8 carriage pack plus door collection system for 2 door or 3 door setup)
4. Fascia and End Caps (Optional): Specify finish

SofStop® Features & Options

- High quality mechanism independently tested to 100,000 cycles
- Soft close mechanism is hidden from sight, yet remains fully serviceable

Standard	M6 (200lb/90kg)		
	M8 (500lb/240kg)		
CS SofStop	Minimum Door Width		
	No Stop	1 Stop	2 Stops
0 - 200 lb (90kg)	23" (584mm)	26" (660mm)	28" (711mm)
CS SofStop HD	Minimum Door Width		
	No Stop	1 Stop	2 Stops
0 - 350 lb (160kg)	26" (660mm)	29" (737mm)	31" (787mm)

© All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. 10/2025

CavitySliders.com



sales@cavitysliders.com

(888) 466-0030




WallMountTrack Product Codes

Tracks

Item	Description	Length	Code
	CS WallMount Track Kit (including fascia and end caps) Suits 1-3/8" to 1-3/4" door thickness Natural (Clear) Anodized	6ft	TSWMNA-6
		8ft	TSWMNA-8
		12ft	TSWMNA-12
		24ft	TSWMNA-24
		Custom	TSWMNA-NSS
	CS WallMount Track Kit (including fascia and end caps) Suits 1-3/8" to 1-3/4" door thickness Bronze Anodized	6ft	TSWMBA-6
		8ft	TSWMBA-8
		12ft	TSWMBA-12
		24ft	TSWMBA-24
		Custom	TSWMBA-NSS
	CS WallMount Track (Carriage Section only)	Custom	ZA00244

Carriage Packs

Item	Description	Code
	M6 (200lb) with 2 track stops	DKM0621
	M8 (500lb) with 2 track stops	DKM0821
	SofStop Single Action (0-200 lb) with 2 stops	DKS0521
	SofStop Double Action (0-200 lb) with 2 stops	DKS0721
	SofStop HD Double Action (200-350 lb) with 2 stops	DKS0821

© All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. 10/2025

CavitySliders.com

sales@cavitysliders.com

(888) 466-0030



Specs and Instructions

